




PHOENIX MODEL®

# Instruction Manual

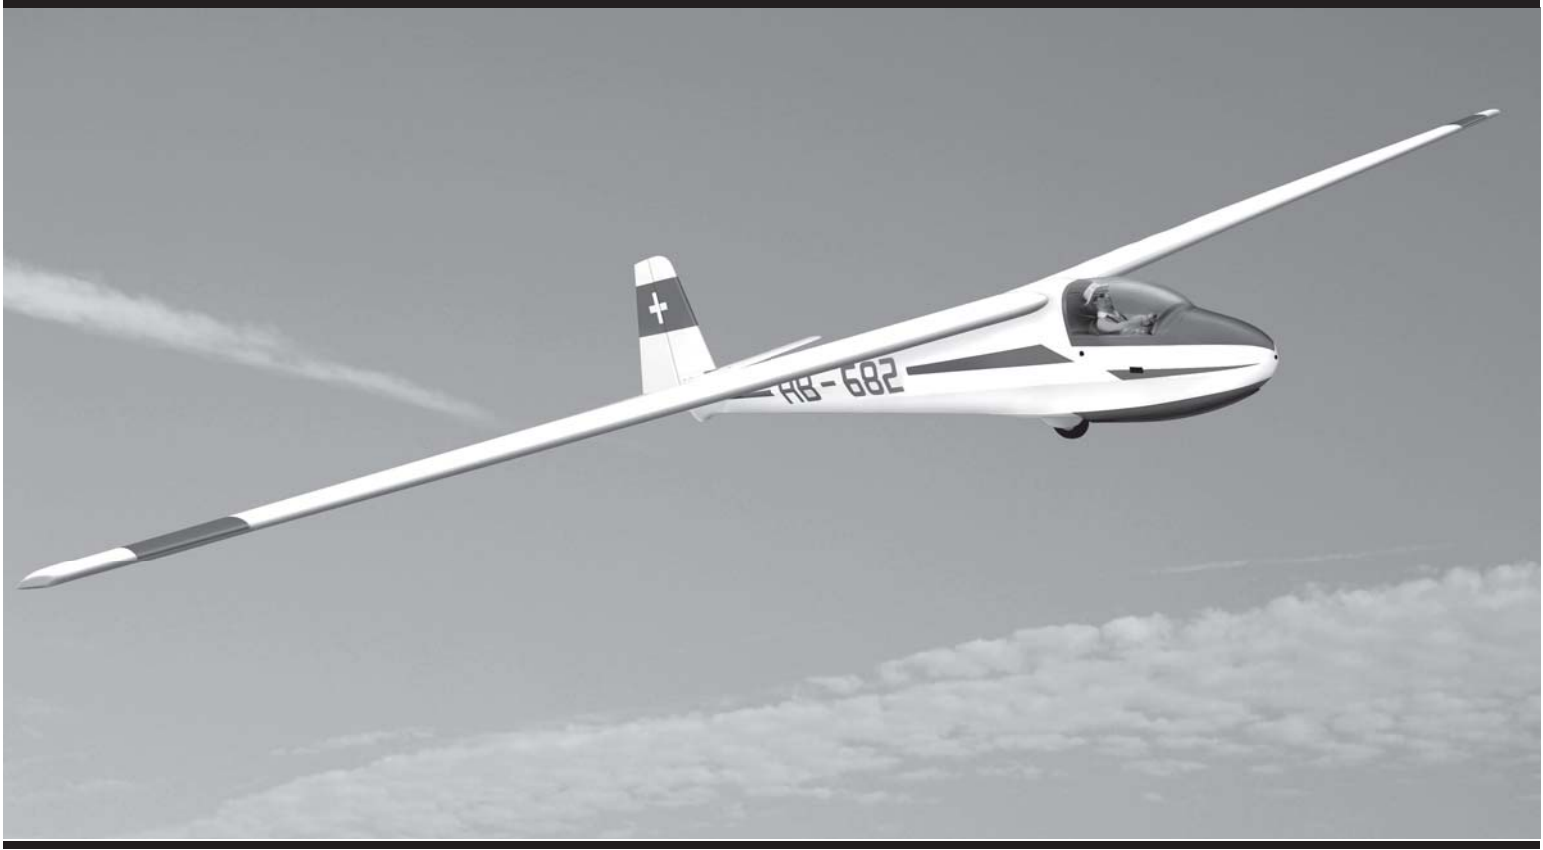

# K8B



**Wingspan** : 3500mm (137.8 inch)



**Length** : 1650mm (64.96 inch)



**Weight** : 3700gr



**Radio** : 5 servo standard / 6 channel

**KIT CONTENTS:** We have organized the parts as they come out of the box for better identification during assembly. We recommend that you regroup the parts in the same manner. This will ensure you have all of parts required before you begin assembly.

## **KIT CONTENTS**

### **FUSELAGE WHEEL ASSEMBLY**

- (1) 5mm x 40mm metal pushrod
- (1) 75mm diameter wheel
- (2) 5mm wheel collar
- (4) Wood plate

### **ELEVATOR CONTROL SYSTEM**

- (2) Control horn
- (2) 3mm x 40mm screw
- (2) Horn
- (2) M2 metal clevis
- (2) Silicone tube
- (1) Nylon snap keeper
- (1) Domino connector
- (1) 1,7mm x 100mm metal pushrod

### **RUDDER CONTROL SYSTEM**

- (1) Control horn
- (1) 3mm x 50mm screw
- (1) M2 metal clevis
- (1) Silicone tube
- (1) Nylon snap keeper
- (1) Horn

### **AILERON CONTROL SYSTEM**

- (2) Control horn
- (2) 3mm x 40mm screw
- (2) M2 metal clevis
- (2) Horn
- (2) Nylon snap keeper
- (2) Silicone tube
- (8) 2mm x 10mm wood screw
- (2) 1,7mm x 180mm metal pushrod

### **MISCELLANEOUS ITEMS**

- (2) Dihedral
- (4) Wing screw
- (2) 4mm x 30mm nylon screw
- (2) 4mm x 20mm machine screw
- (2) 4mm x 40mm screw
- (4) 4mm flat washer
- (4) 8mm flat washer
- (1) Metal connector
- (1) 1,7mm x 100mm metal pushrod
- (3) 1,7mm x 1300mm metal pushrod
- (2) Plastic cover
- (1) Instruction manual
- (1) Decal sheet

## **TOOLS AND SUPPLIES NEEDED.**

- Medium C/A glue.
- 30 minute epoxy.
- 6 minute epoxy.
- Hand or electric drill.
- Assorted drill bits.
- Modeling knife.
- Straight edge ruler.
- 2 bender plier.
- Wire cutters.
- Masking tape.
- Thread lock.
- Paper towels.
- Rubbing alcohol

## **SUGGESTION**

To avoid scratching your new airplane, do not unwrap the pieces until they are needed for assembly. Cover your workbench with an old towel or brown paper, both to protect the aircraft and to protect the table. Keep a couple of jars or bowls handy to hold the small parts after you open the bag.

## **NOTE:**

Please trial fit all the parts. Make sure you have the correct parts and that they fit and are aligned properly before gluing! This will assure proper assembly. The K8B is hand made from natural materials, every plane is unique and minor adjustments may have to be made. However, you should find the fit superior and assembly simple.


The painted and plastic parts used in this kit are fuel proof. However, they are not tolerant of many harsh chemicals including the following: paint thinner, C/A glue accelerator, C/A glue debonder and acetone. Do not let these chemicals come in contact with the colors on the covering and the plastic parts.

## **SAFETY PRECAUTION:**

- This is not a toy
- Be sure that no other flyers are using your radio frequency.
- Do not smoke near fuel
- Store fuel in a cool, dry place, away from children and pets.
- Wear safety glasses.
- The glow plug clip must be securely attached to the glow plug.
- Do not flip the propeller with your fingers.
- Keep loose clothing and wires away from the propeller.
- Do not start the engine if people are near. Do not stand in line with the side of the propeller.
- Make engine adjustments from behind the propeller only. Do not reach around the spinning propeller.


## **PREPARATIONS**

Remove the tape and separate the ailerons from the wing and the elevators from the stab. Use a covering iron with a covering sock on high heat to tighten the covering if necessary. Apply pressure over sheeted areas to thoroughly bond the covering to the wood.

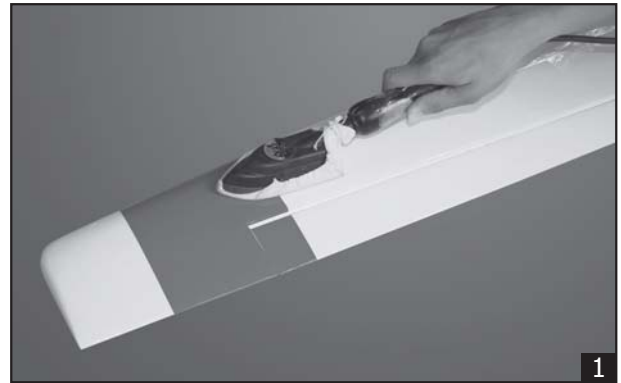


## **INSTALLING THE AILERONS**

1. Use the modeling knife to cut a strip of covering from the hinge slots in the wing and aileron.

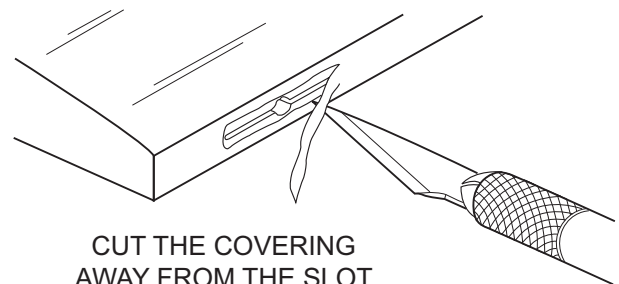


2. Locate the four CA hinge strip. Snip off the corners so they go in easier.
3. Test fit the ailerons to the wing with the hinges. If the hinges don't remain centered, stick a pin through the middle of the hinge to hold it in position.

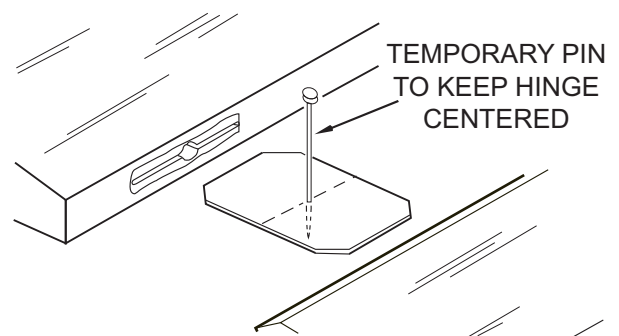


4. Remove any pins you may have inserted into the hinges. Adjust the aileron so there is a small gap between the LE of the aileron and the wing. The gap should be small, just enough to see light through or to slip a piece of paper through.

5. Apply six drops of thin CA to the top and bottom of each hinge. Do not use CA accelerator. After the CA has fully hardened, test the hinges by pulling on the aileron.

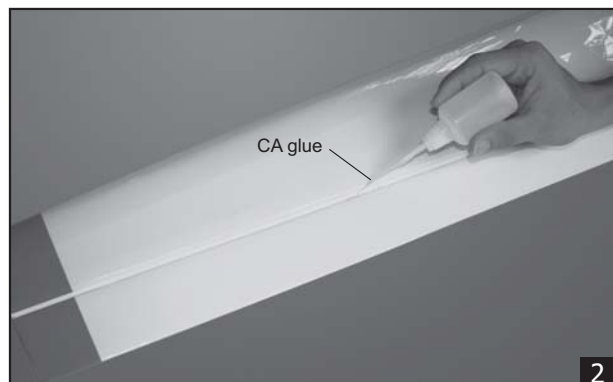


## INSTALLING THE AILERON SERVOS

1. Install the rubber grommets and brass eyelets onto the aileron servo.
2. Using a modeling knife, remove the covering from over the pre-cut servo arm exit hole on the aileron servo tray / hatch. This hole will allow the servo arm to pass through when installing the aileron pushrods.

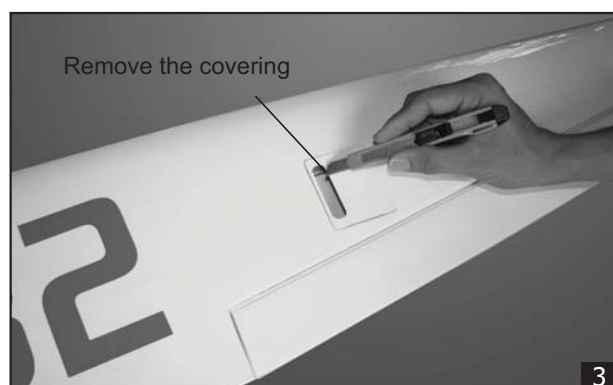

3. Place the servo into the servo tray. Center the servo within the tray and drill 1,6mm pilot holes through the block of wood for each of the four mounting screws provided with the servo.

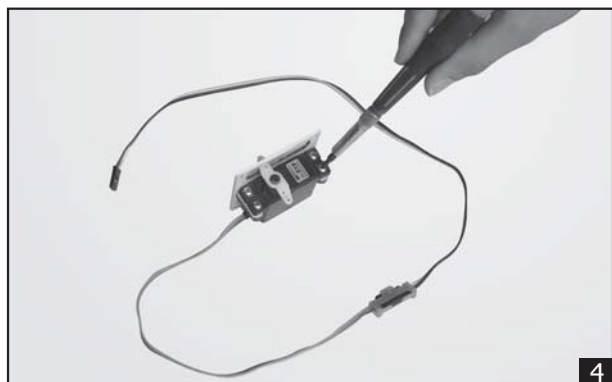

4. Using the thread as a guide and using masking tape, tape the servo lead to the end of the thread: carefully pull the thread out. When you have pulled the servo lead out, remove the masking tape and the servo lead from the thread.



5. Place the aileron servo tray / hatch into the servo box on the bottom of the wing and drill 1,6mm pilot holes through the tray and the servo box for each of the four mounting screws. Secure the servo tray in place using the mounting screws provided ( 2mm x 12mm ).





6. Repeat step # 2 - # 5 to install the second aileron servo in the opposite wing half.



7. Using masking tape, tape the servo leads on to the top of the wing.

## INSTALLING THE CONTROL HORNS

1. One aileron control horn in positioned on each aileron. Using a ruler and a pen, locate and mark the location of the control horn. It should be mounted on the bottom side of the aileron at the leading edge, in line with the aileron pushrod.
2. Drill 3mm holes through the aileron using the control horn as a guide and screw the control horn in place.

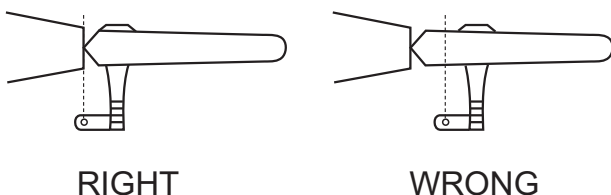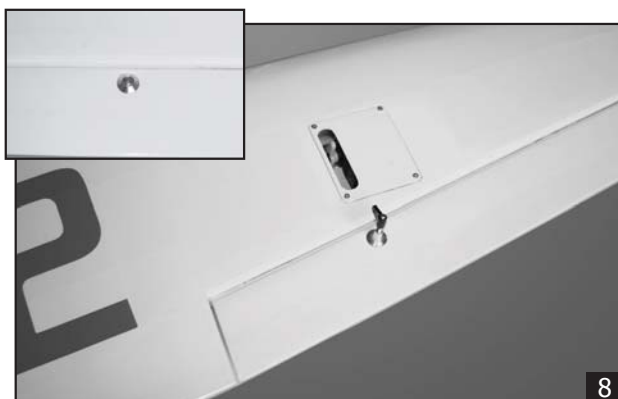

3. Repeat step # 1 - # 2 to install the control horn on the opposite aileron.


## INSTALLING THE AILERON LINKAGES

1. Working with the aileron linkage for now, thread one nylon clevis at least 14 turns onto one of the 2mm x 180mm threaded wires.




2. Attach the clevis to the outer hole in the control horn. Install a silicone tube on the clevis.

3. Locate one nylon servo arm, and using wire cutters, remove all but one of the arms. Using a 2mm drill bit, enlarge the third hole out from the center of the arm to accommodate the aileron pushrod wire.
4. Plug the aileron servo into the receiver and center the servo. Install the servo arm onto the servo. The servo arm should be perpendicular to the servo and point toward the middle of the wing.
5. Center the aileron and hold it in place using a couple of pieces of masking tape.
6. With the aileron and aileron servo centered, carefully place a mark on the aileron pushrod wire where it crosses the hole in the servo arm.
7. Using pliers, carefully make a 90 degree bend down at the mark made. Cut off the excess wire, leaving about 4mm beyond the bend.
8. Insert the 90 degree bend down through the hole in the servo arm. Install one nylon snap keeper over the wire to secure it to the arm. Install the servo arm retaining screw and remove the masking tape from the aileron.

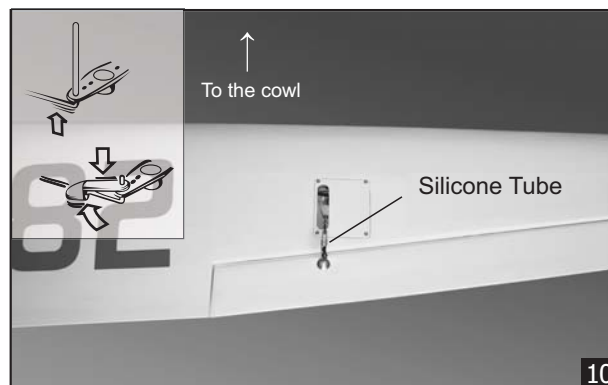


9. Repeat step # 4 - # 8 to install the second aileron linkage. After both linkages are completed, connect both of the aileron servo leads using a Y-harness you have purchased separately.

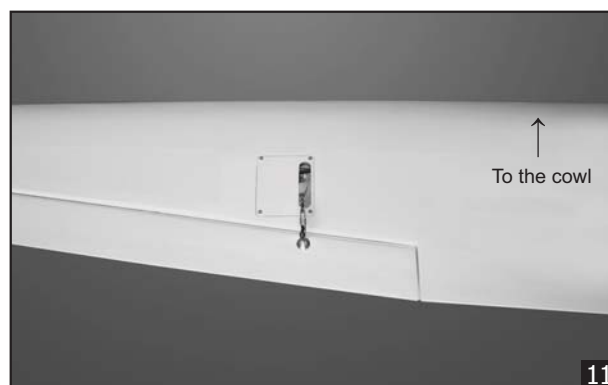


## INSTALLING THE HORIZONTAL STABILIZER


1. Remove the covering.

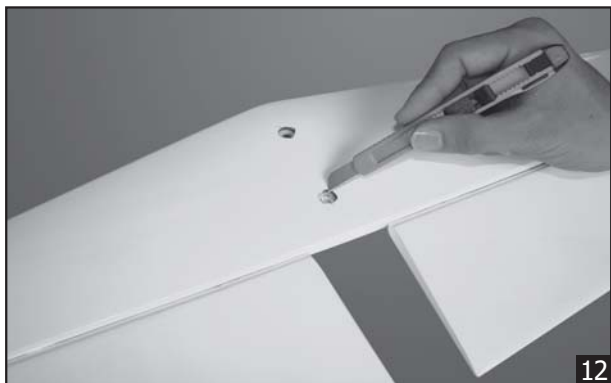


2. Attach the wing to the fuselage as picture.

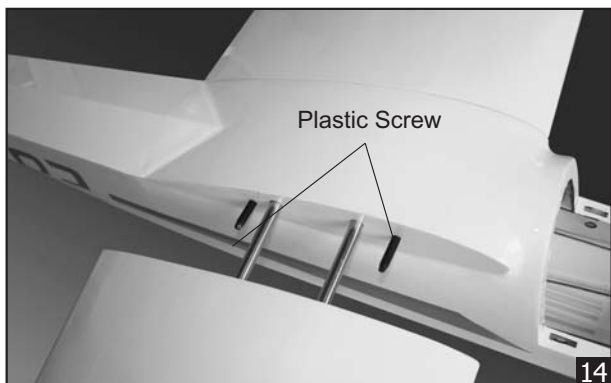

3. Test the position of the elevator and adjust it as shown.

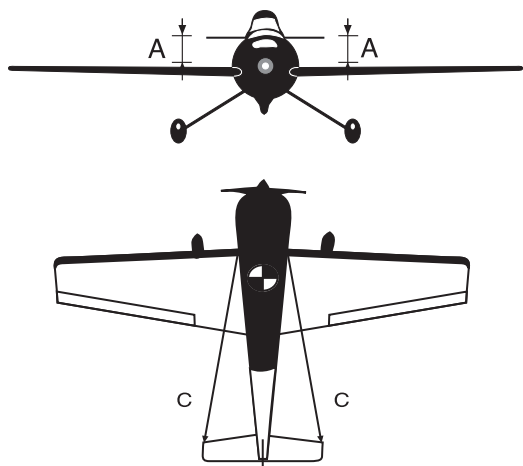


4. Secure the horizontal onto the fuselage.

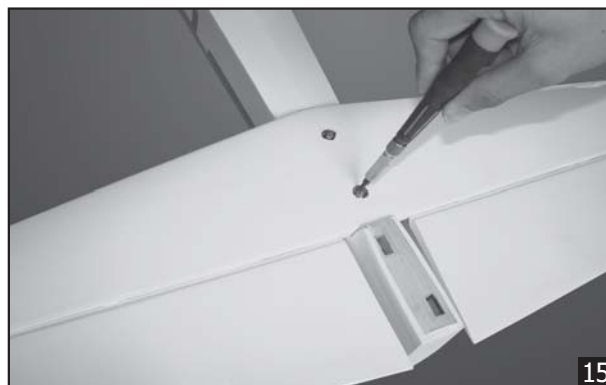


## INSTALLING THE ELEVATOR

- Repeat step #1 - #5 from installing the aileron to install the elevator.

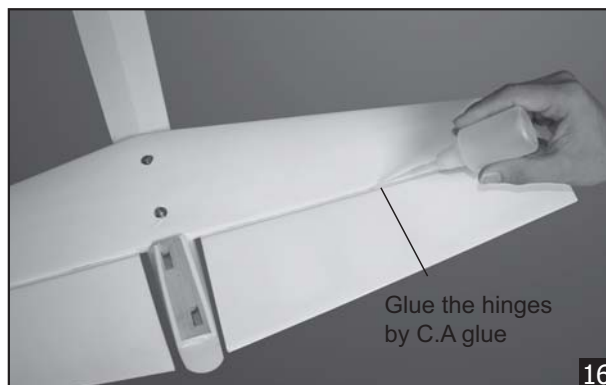

## INSTALLING THE RUDDER

1. Repeat step #1 - #5 from installing the aileron to install the rudder.

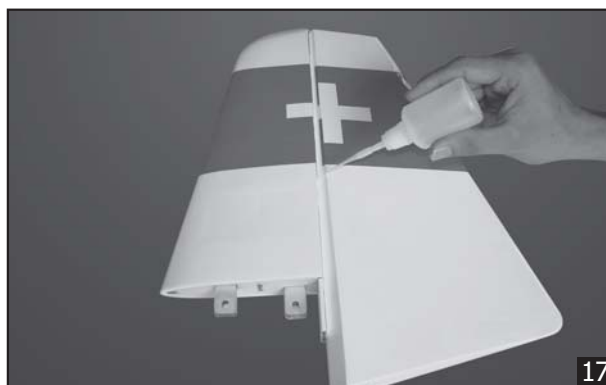

2. Remove the covering from the fuselage.






3. Insert the vertical stabilizer into the fuselage.



4. Remove the covering from the fuselage.




5. Secure the vertical stabilizer into the fuselage.

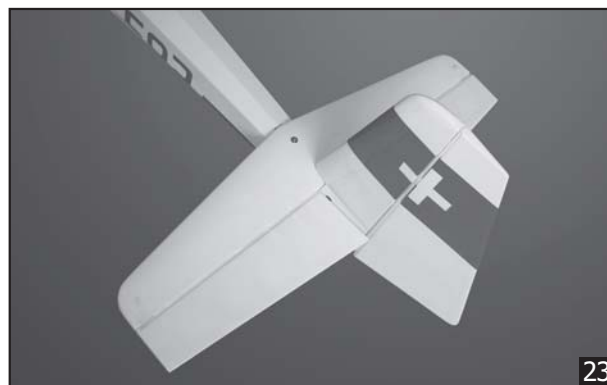


## **INSTALLING THE MAIN LANDING GEAR**


1. The full set wheel.

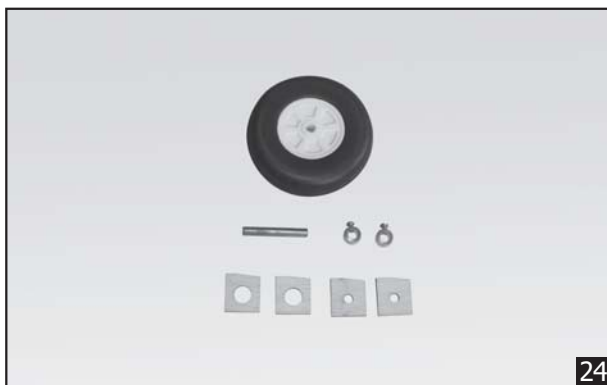

2. Secure the collars.

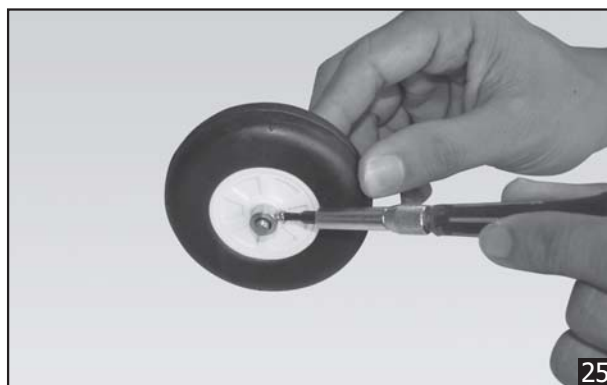


3. Glue the wooden plate to the fuselage.

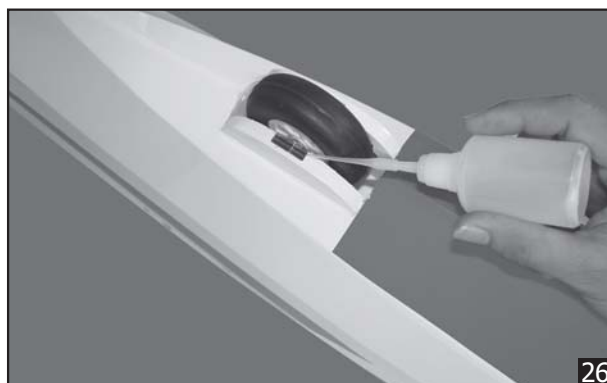

## SERVO INSTALLATION

### INSTALLING THE FUSELAGE SERVOS

1. Install the rubber grommets and brass collets into the elevator, rudder and towing servos. Test fit the servos into the servo tray. Trim the tray if necessary to fit your servos
2. Mount the servos to the tray using the mounting screws provided with your radio system.


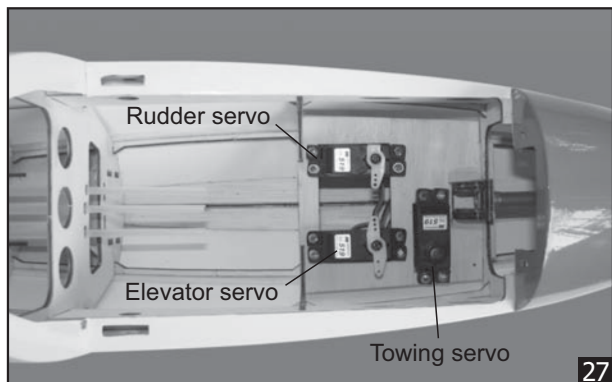


### INSTALLING THE ELEVATOR PUSHROD


1. Locate the pushrod exit slot on the right side and left side of the fuselage. It is located slightly ahead and below the horizontal stabilizer.
2. Carefully cut away the covering material from the slot.



3. Working from inside the fuselage, slide the threaded end of the pushrod until it reaches the exit slot. Carefully reach in with a small screw driver and guide the pushrod out of the exit slot.
4. Install the clevis on the elevator pushrod. Make sure 6mm of thread shows inside the clevis.
5. The control horn should be mounted on the bottom, left side and right side of the elevator at the leading edge, in line with the elevator pushrod.
6. Drill 3mm holes through the elevator using the control horn as a guide and screw the control horn in place.

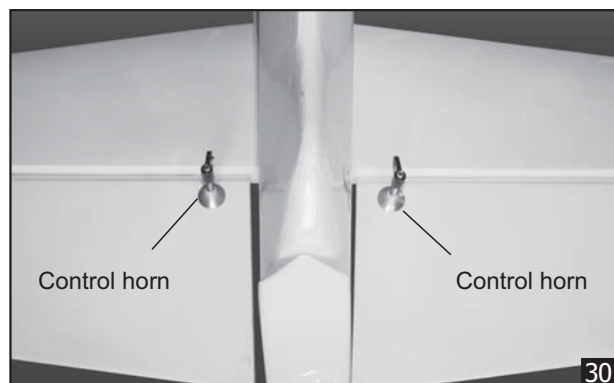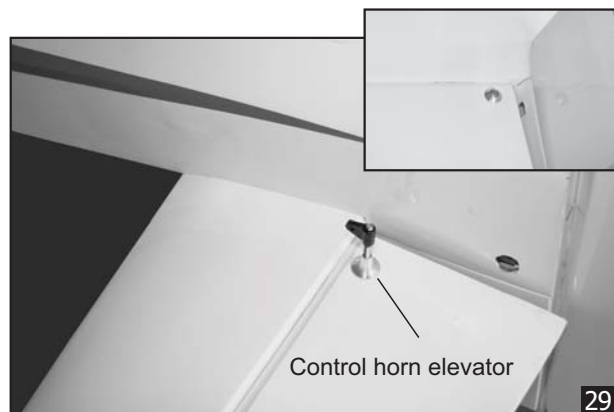


7. Attach clevis to the third hole in the control horn. Install a silicone tube on the clevis.

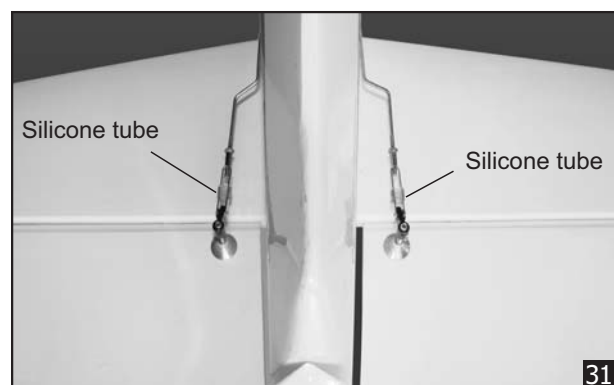

8. Locate one nylon servo arm, and using wire cutters, remove all but one of the arms. Using a 2mm drill bit, enlarge the third hole out from the center to accommodate the elevator pushrod wire.
9. Plug the elevator servo into the receiver and center the servo. Install the servo arm onto the servo. The servo arm should be perpendicular to the servo and point toward the middle of the fuselage.
10. Be sure both elevator halves are flat. Center both elevator halves and hold them in place using a couple of pieces of masking tape.
11. Connect two elevator pushrod to the metal domino connector and secure it. Insert the wire pushrod into the metal domino connector and secure it.




12. With the elevator halves and elevator servo centered, carefully place a mark on the elevator pushrod wire where it crosses the hole in the servo arm.
13. Using pliers, carefully make a 90 degree bend up at the mark made. Cut off the excess wire, leaving about 8mm beyond the bend.
14. Insert the 90 degree bend up through the hole in the servo arm, install one nylon snap keeper over the wire to secure it to the arm. Install the servo arm retaining screw and remove the masking tape the elevator halves.
15. Using thick CA glue, secure the pushrod sleeves to the pushrod sleeve guide.

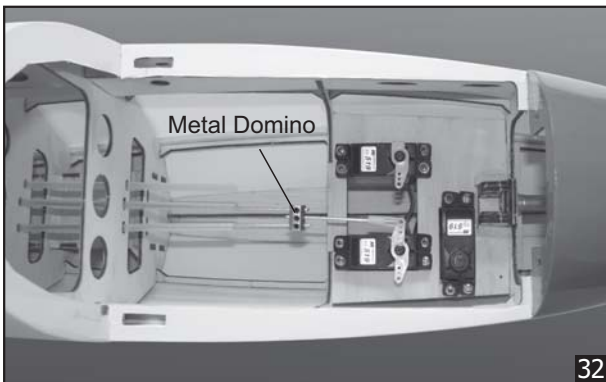


## INSTALLING THE RUDDER PUSHROD

1. Locate the pushrod exit slot on the left of the fuselage.
2. Carefully cut away the covering material from the slot.

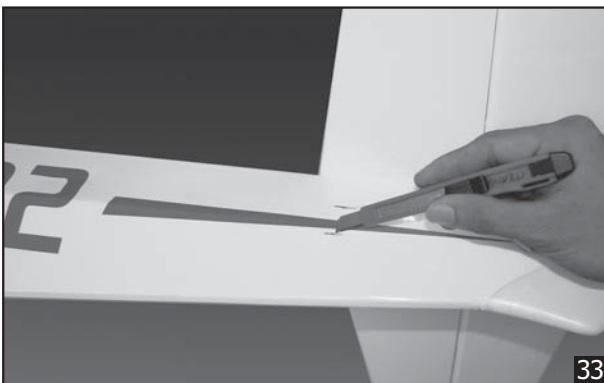


3. Working from inside the fuselage, slide the threaded end of the remaining pushrod down the inside of the fuselage until the pushrod reaches the exit slot. Carefully reach in with a small screw driver and guide the pushrod out of the exit slot.
4. Install the clevis on the rudder pushrod. Make sure 6mm of thread shows inside the clevis.
5. The control horn should be mounted on the left side of the rudder at the leading edge, in line with the rudder pushrod.


6. Drill 3mm holes through the rudder using the control horn as a guide and screw the control horn in place.

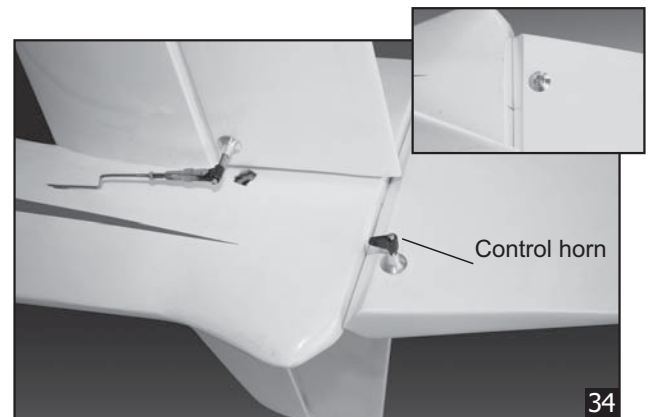

7. Attach clevis to the third hole in the control horn. Install a silicone tube on the clevis.

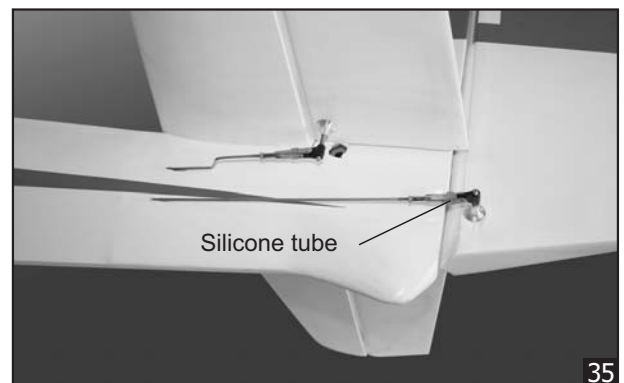


8. Locate one nylon servo arm, and using wire cutters, remove all but one of the arms using a 2mm drill bit, enlarge the third hole out from the center to accommodate the rudder pushrod wire.
9. Plug the rudder servo into the receiver and center the servo. Install the servo arm onto the servo.
10. Center the rudder and hold it in place using a piece of masking tape.
11. With the rudder and rudder servo centered, carefully place a mark on the rudder pushrod wire where it crosses the hole in the servo arm.
12. Using a pliers, carefully make a 90 degree bend up at the mark made. Cut off excess wire, leaving about 8mm beyond the bend.
13. Insert the 90 degree bend up through the hole in the servo arm. Install one nylon snap keeper over the wire to secure it to the arm. Install the servo arm retaining screw and remove the masking tape from the rudder.
14. Using thick CA glue, secure the pushrod sleeves to the pushrod sleeve guide.

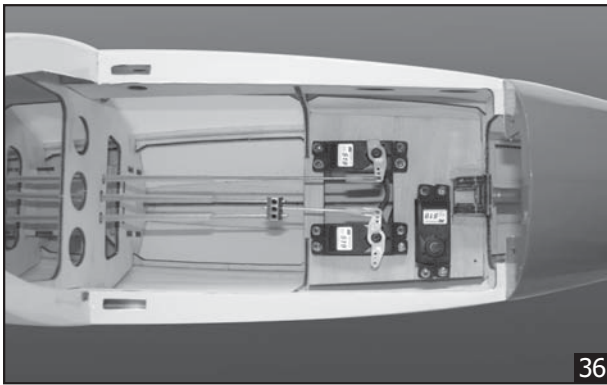


## INSTALLING THE TOWING SERVO


1. Install the metal connector to the servo arm.

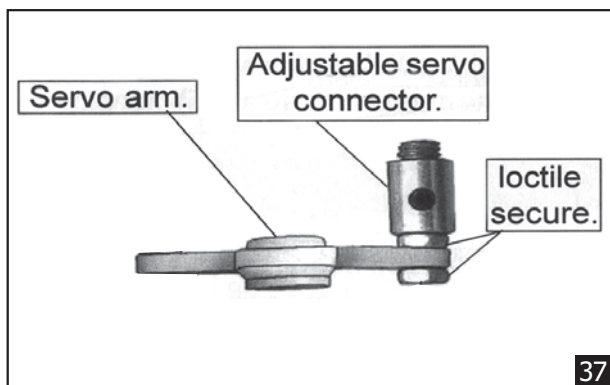

2. Bend "L" the metal rod as the picture below.

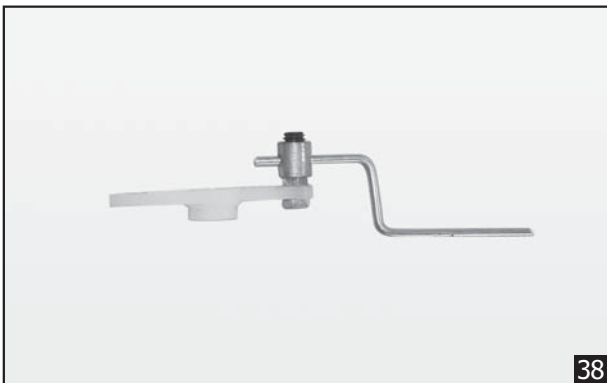

3. Place the servo arm to the servo and secure it.

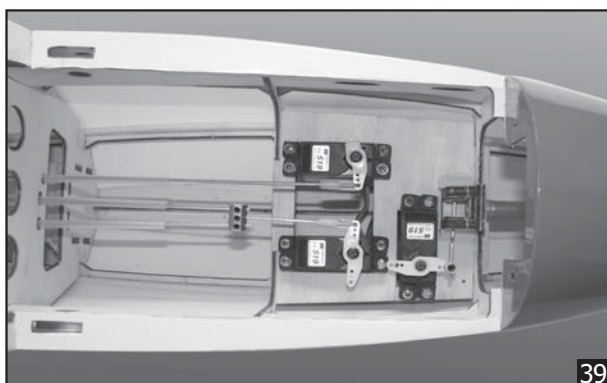

## INSTALLING THE RECEIVER AND BATTERY

1. Plug the servo leads and the switch lead into the receiver. You may want to plug an aileron extension into the receiver to make plugging in the aileron servo lead easier when you are installing the wing. Plug the battery pack lead into the switch.
2. Wrap the receiver and battery pack in the protective foam to protect them from vibration. Use a rubber band or masking tape to hold the foam in place.
3. Position the battery pack and receiver behind the fuel tank. Use the two light plywood pieces, placed over the battery and receiver and glue to the fuselage sides to hold the battery and receiver securely in place. Use 15mm triangle pieces glued between the fuselage sides and the plywood pieces to reinforce the joints.




*Do not permanently secure the receiver and battery until after balancing the model.*

4. Using a 2mm drill bit, drill a hole through the side of the fuselage, near the receiver, for the antenna to exit.

## INSTALLING THE SWITCH


1. The switch should be mounted on the fuselage side, opposite the muffler, close enough to the receiver so the lead will reach. Use the face plate of the switch cut out and locate the mounting holes.
2. Cut out the switch hole using a modeling knife. Use a 2mm drill bit and drill out the two mounting holes through the fuselage side.
3. Secure the switch in place using the two machine screws provided with the radio system.

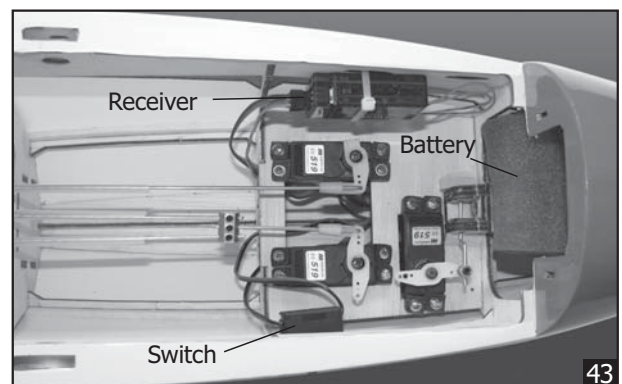

## **OPEN AND CLOSE THE CANOPY**



- Glue the plastic cover to the fuselage.

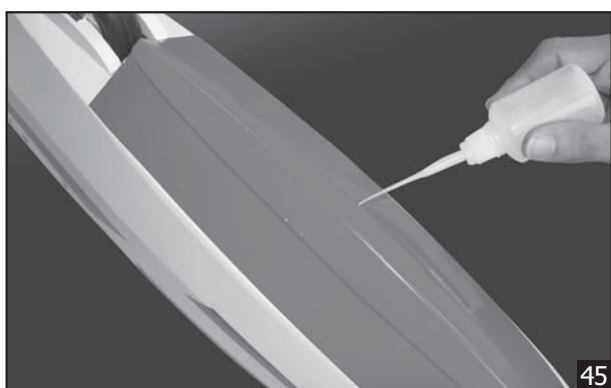

- Glue the plastic cover to the fuselage.




## **BALANCING**

1. It is critical that your airplane be balanced correctly. Improper balance will cause your plane to lose control and crash.

THE CENTER OF GRAVITY IS LOCATED 80mm BACK FROM THE LEADING EDGE OF THE WING, AT THE FUSELAGE. This location is recommended for initial test flying and trimming. There is a 5mm margin forward and aft. BALANCE A PLANE UPSIDE DOWN WITH THE FUEL TANK EMPTY.

2. Mount the wing to the fuselage. Using a couple of pieces of masking tape, place them on the top side of the wing 80mm back from the leading edge, at the fuselage sides.

3. Turn the airplane upside down. Place your fingers on the masking tape and carefully lift the plane .
4. If the nose of the plane falls, the plane is nose heavy. To correct this first move the battery pack further back in the fuselage. If this is not possible or does not correct it, stick small amounts of lead weight on the fuselage under the horizontal stabilizer. If the tail of the plane falls, the plane is tail heavy. To correct this, move the battery and receiver forward or if this is not possible, stick weight into the firewall. When balanced correctly, the airplane should sit level or slightly nose down when you lift it up with your fingers.

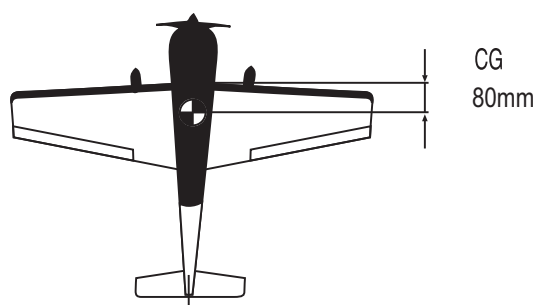

## **LATERAL BALANCE**




*After you have balanced a plane on the C.G. You should laterally balance it. Doing this will help the airplane track straighter.*

5. Turn the airplane upside down. Attach one loop of heavy string to the engine crankshaft and one to the tail wheel wire. With the wings level, carefully lift the airplane by the string. This may require two people to make it easier.
6. If one side of the wing fall, that side is heavier than the opposite. Add small amounts of lead weight to the bottom side of the lighter wing half's wing tip. Follow this procedure until the wing stays level when you lift the airplane.

## **CONTROL THROWS**

1. We highly recommend setting up a plane using the control throws listed.
2. The control throws should be measured at the widest point of each control surface.
3. Check to be sure the control surfaces move in the correct directions.


Aileron	: 10mm up	10mm down
Elevator	: 8mm up	8mm down
Rudder	: 30mm right	30 mm left

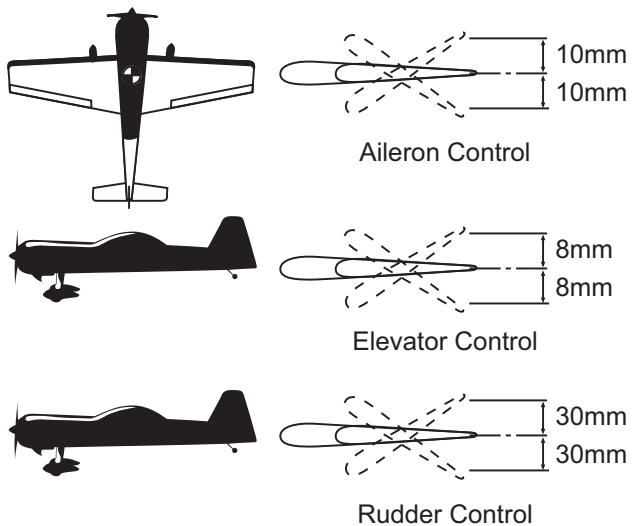

## **FLIGHT PREPARATION**

### **PRE FLIGHT CHECK**


1. Completely charge your transmitter and receiver batteries before your first day of flying.
2. Check every bolt and every glue joint in your plane to ensure that everything is tight and well bonded.
3. Double check the balance of the airplane.
4. Check the control surface.
5. Check the receiver antenna . It should be fully extended and not coiled up inside the fuselage.
6. Properly balance the propeller.

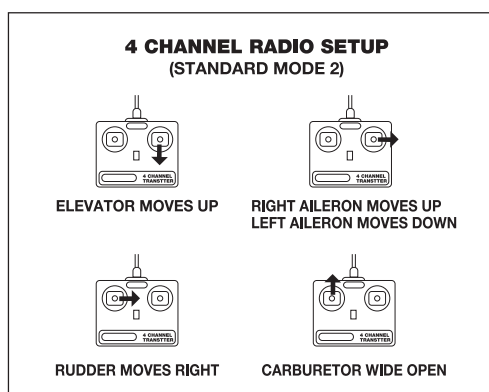

# I/C FLIGHT WARNINGS



Always operate in open areas, away from factories, hospitals, schools, buildings and houses etc. **NEVER** fly your aircraft close to people or built up areas.




## **THE PROPELLER IS DANGEROUS**


Keep fingers, clothing (ties, shirt sleeves, scarves) or any other loose objects that could be caught or drawn in, away from the propeller. Take care at **ALL** times.




Keep all onlookers (especially small children and animals) well back from the area of operation. This is a flying aircraft, which will cause serious injury in case of impact with a person or animal.

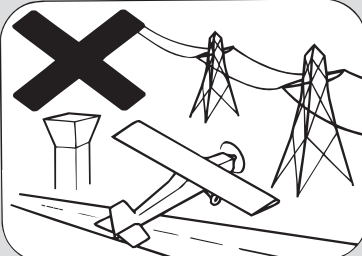


**NEVER** fly near power lines, aerials or other dangerous areas including airports, motorways etc.




**NEVER** use damaged or deformed propellers or spinners.

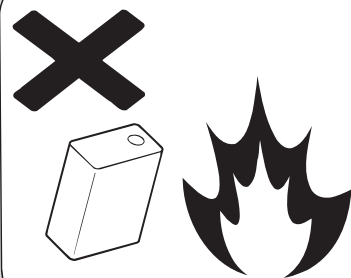

**DO NOT** dispose of empty fuel containers on a fire, this can lead to an explosion.

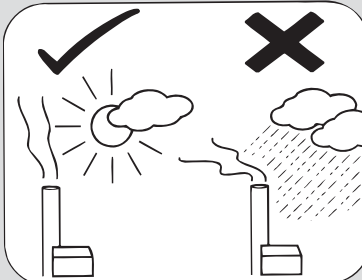


**NEVER** fly in wet conditions or on windy or stormy days.

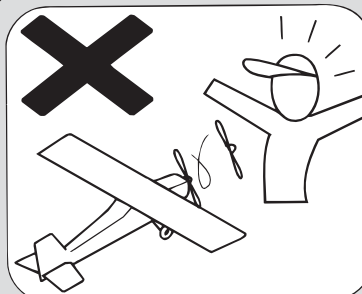


**ALWAYS** adjust the engine from behind the propeller, and do not allow any part of your body to be in line with the propeller.




# I/C FLIGHT GUIDELINES




When ready to fly, first extend the transmitter aerial.

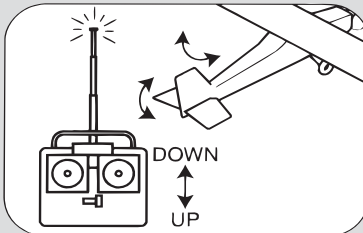


Operate the control sticks on the transmitter and check that the control surfaces move freely and in the **CORRECT** directions.

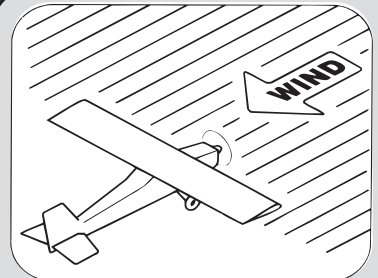


**ALWAYS** land the model **INTO** the wind, this ensures that the model lands at the slowest possible speed.




Switch on the transmitter.

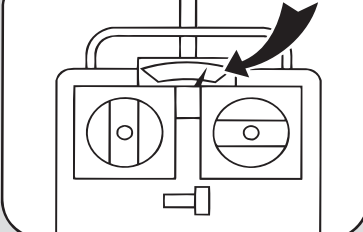


Check that the transmitter batteries have adequate power.

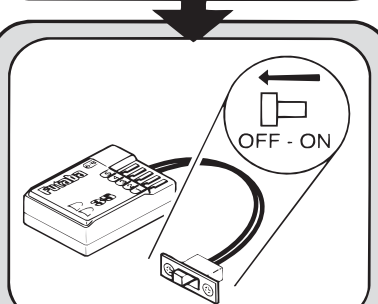


Switch off the receiver.




Switch on the receiver.

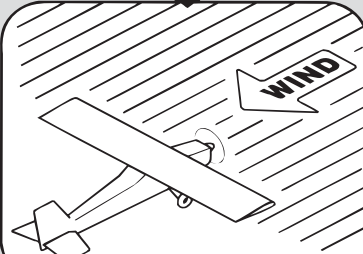

**ALWAYS** take off into the wind.

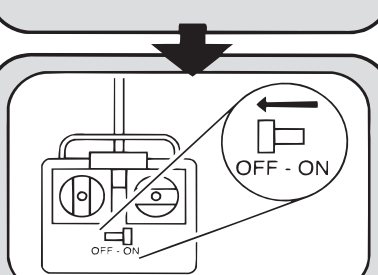


Switch off the transmitter.



Check that the wings are correctly fitted to the fuselage.



If the model does not respond correctly to the controls, land it as soon as possible and correct the fault.

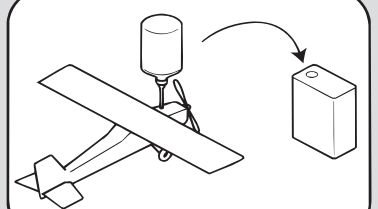

Empty the fuel tank after flying, fuel left in the tank can cause corrosion and lead to engine problems.